

Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____



Performance and efficiency

Cooling		Heating	
18,000 (4,600~23,100)		18,000(5,700~23,100)	
SEER/SEER2	19/19	COP	3.6
EER/EER2	12.5/12.5	HSPF2-4	10.1
		HSPF2-5	8.5

Operational temperature

Indoor		Outdoor	
Cooling	Heating	Cooling	Heating
60~90	32~86	-22 ~ 122	-22~75



This warranty should be registered on our website www.cooperandhunter.us within 60 days of installation. The warranty is only valid when installed by a Licensed HVAC Technician. A warranty period of Seven (7) years on compressor to the original registered end-user. A warranty period of Five (5) years on all parts to the original registered end-user. Warranty applies only to products remaining in their original installation location.

INDOOR UNIT FEATURES:

- ◆ ADAPTIVE MULTI-VOLTAGE - 115V & 208-230V
- ◆ M-COIL
- ◆ TU1 COPPER TUBES
- ◆ SYMMETRIC FAN BLOWER DESIGN
- ◆ TURBO MODE
- ◆ SLIMMER INDOOR UNITS
- ◆ AUXILIARY HEATER
- ◆ REFRIGERANT LEAK SENSORS
- ◆ FAST COOL/HEAT FUNCTION
- ◆ ALUMINIUM COIL
- ◆ WIRED THERMOSTAT CONTROLLER INCLUD
- ◆ SMART BUILT-IN KIT
- ◆ TRUE MULTI-POSITION AIR HANDLER
- ◆ SLEEP MODE
- ◆ GOLD FIN

OUTDOOR UNIT FEATURES:

- ◆ Inverter technology
- ◆ Variable speed (fan motor & compressor)
- ◆ Heating operation in temperatures to -22 °F
- ◆ 3-Minute restart delay
- ◆ Self-diagnosis
- ◆ Drain pan heater and compressor heating belt
- ◆ Auto restart function
- ◆ Defrost
- ◆ High-efficiency pipes
- ◆ High-frequency racer technology
- ◆ Intelligent dusting switch
- ◆ Gold fin

INCLUDED ACCESSORIES:


- ◆ Wireless remote
- ◆ Wired thermostat

Indoor Model		CH-PQ18AHU	
Power supply		V, Ph, Hz	115 or 208-230V, 1Ph, 60Hz
Voltage range		V	187-253
Connection wiring			AWG 20-2
Cooling	Capacity	Btu/h	18,000 (4,600~23,100)
	Input	w	1,440 (530~2,020)
	Rated current	A	9.3 (4.1~8.9)
	EER/EER2	Btu/w	12.5/12.5
	SEER/SEER2	Btu/w	19/19
Heating at 47 °F	Capacity	Btu/h	18,000(5,700~23,100)
	Input	kW	1,465 (410~1,900)
	Rated current	A	9.4 (2.2~8.4)
	COP	W/W	3.6
	HSPF2-4	Btu/w	10.1
	HSPF2-5	Btu/w	8.5
Min. circuit ampacity for 230V		A	5.5/3.5
Max. fuse		A	15
Indoor fan motor	Qty		1
	Input	w	/
	RLA	A	2
Indoor air flow (Turbo/Hi/Med/Lo) (No duct)		CFM	618.0 / 576.8 / 529.7 / 488.5
ESP	Range	ln.wg.	0-1.2
Indoor noise level (Hi/Med/Lo)		dB(A)	42.5/40.5/37
Dehumidification		pnt/h	3.7
Indoor unit	Dimensions (WxDxH)	in	14.49 x21.50 x 49.72
	Packing (WxDxH)	in	17.52 x 31.10 x 52.95
	Net/Gross weight	lbs	123.02/154.76
Drainage water pipe diameter		in	1"
Refrigerant piping	Liquid side/Gas side	in	3/8"/3/4"
Controller			120N wire controller + remote controller
Room temperature	Cooling	F	60~90
	Heating	F	32~86


NOTE: Static Pressure values may vary when adding the auxiliary heater.

Outdoor Model			CH-PQ18-230VO
Power supply		V, Ph, Hz	208-230V
Min. circuit ampacity		A	16
Max. fuse		A	20
Compressor	Model		KTM240D46UKT2
	Type		ROTARY
	Brand		GMCC
	Capacity	Btu/h	25,930
	Input	W	2,045
	Refrigerant oil	oz	VG74 21
Outdoor fan motor	Qty		1
	Input	W	80
	RLA	A	0.9
	Speed	r/min	780/700/550
Outdoor air flow (Max)		CFM	1,765.8
Outdoor noise level (Max)		dB(A)	56.5
Outdoor unit	Dimensions (WxDxH)	in	35.04 x 13.46 x 26.50
	Packing (WxDxH)	in	39.17 x 15.67 x 29.13
	Net/Gross weight	lbs	101.41/109.13
Refrigerant	Type/Quantity	oz	R454B / 74.08
Refrigerant precharge		ft	25
Additional charge for each ft		oz	0.7
Refrigerant piping	Liquid side/Gas side	in	3/8"/3/4"
	Max. pipe length	ft	164
	Max. difference in level	ft	82
Ambient temperature	Cooling	F	-22 ~ 122
	Heating	F	-22~75

PEAQ

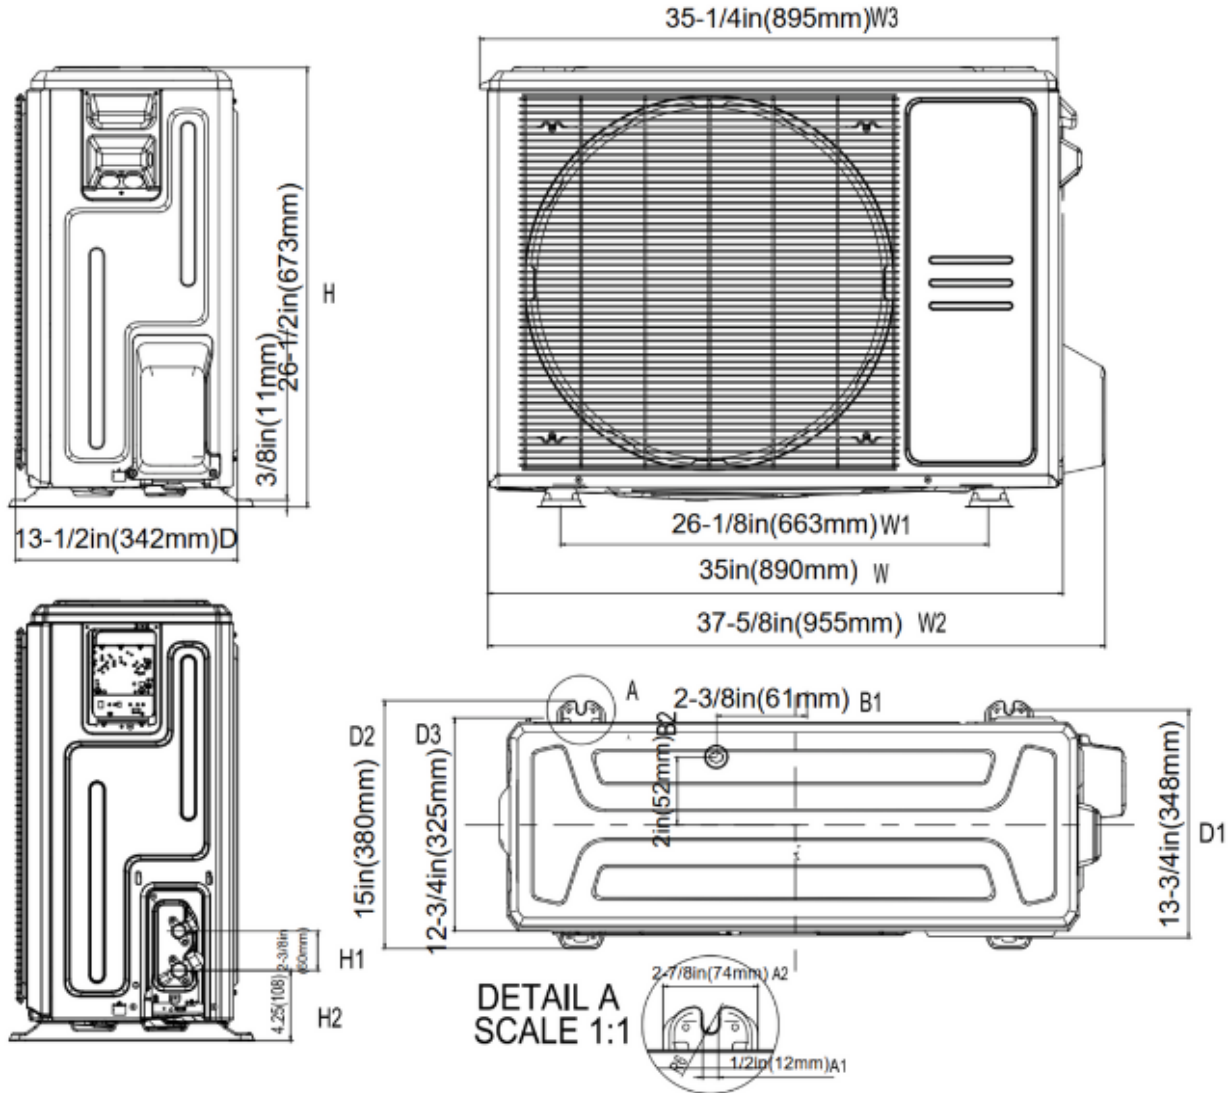

PEAQ

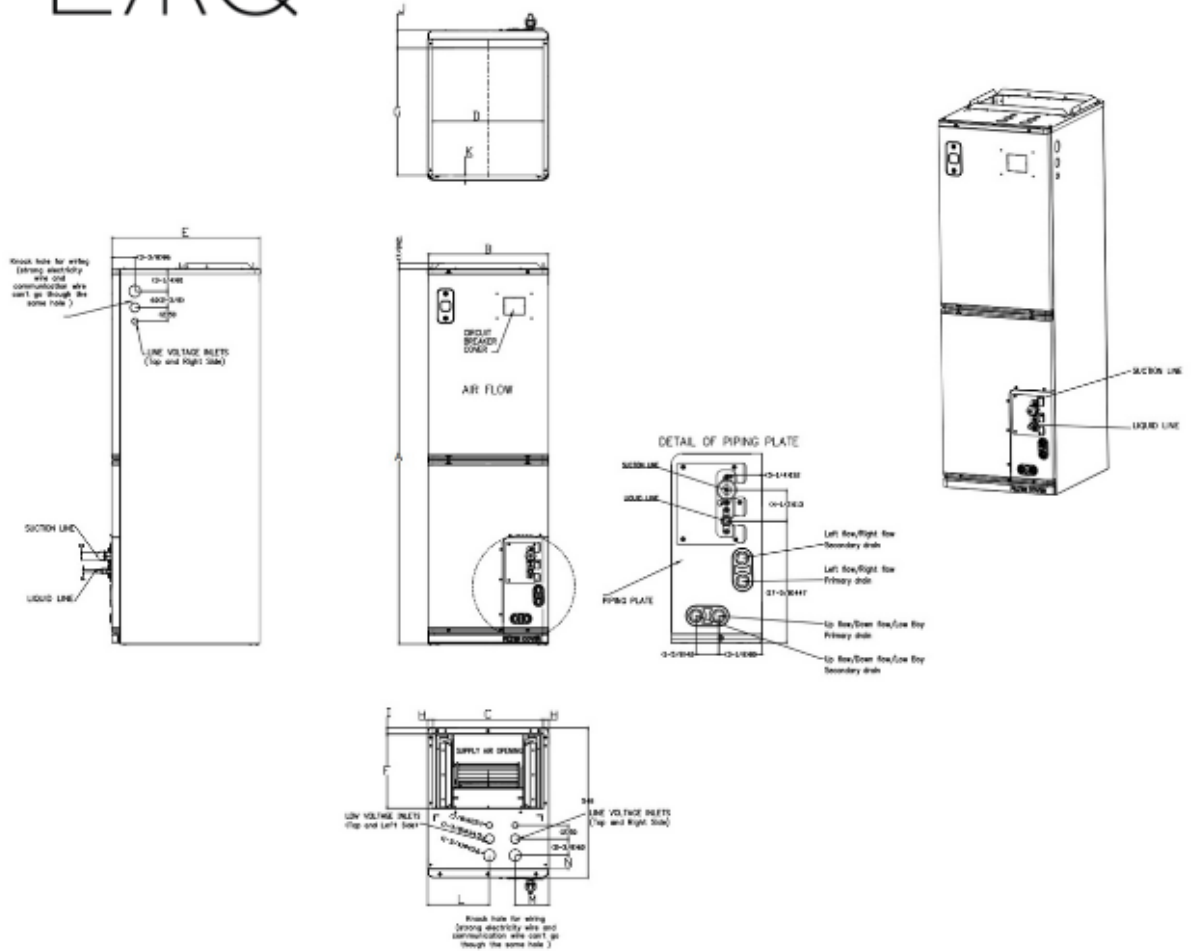

Dimensions	Model(Btu/h)	18K/24K		30K/36K		48K/54K	
		inch	mm	inch	mm	inch	mm
A	Model Height	49-3/4	1263	54	1371	56	1421
B	Model Width	14-1/2	368	17-1/2	445	21-1/2	546
C	Supply Air Opening Width	12-7/8	328	16	405	19-7/8	506
D	Return Air Opening Width	13	331	16	407	20	509
E	Model Depth	21-1/2	546	21-1/2	546	21-1/2	546
F	Supply Air Opening Depth	10-5/8	271	10-5/8	271	10-5/8	271
G	Return Air Opening Depth	18-1/4	465	18-1/4	465	18-1/4	465
H	Supply Air Opening Clearance	7/8	22	7/8	22	7/8	22
I	Supply Air Opening Clearance	1	24	1	24	1	24
J	Return Air Opening Front Clearance	2-1/2	65	2-1/2	65	2-1/2	65
K	Return Air Opening Back Clearance	3/4	18	3/4	18	3/4	18
L	Top cover knock hole	/	/	9	229	10-7/8	275
M	Top cover knock hole	4-1/2	113	4-7/8	124	5-1/8	131
N	Top cover knock hole	2	51	2	51	1-5/8	41
O	Refrigerant piping flareconnection(gas)	3/4	19	3/4	19	3/4	19
P	Refrigerant piping flareconnection(liquid)	3/8	9	3/8	9	3/8	9